

1606-27936


LED Backlight

3 functions


Position/Stop and Dynamic Side Indicator
with LED simulator inbuilt




DIRECTION INDICATOR




Standard indicator



Dynamic indicator sequential
(across both lamps)



Dynamic indicator
simultaneous

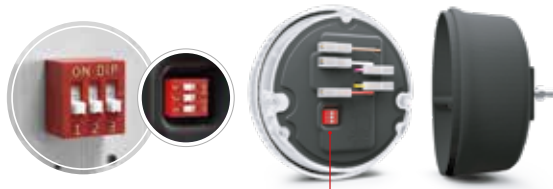

CONTROL UNIT

Open the lamp, disconnect the yellow wire, unscrew the resistor and remove it.
Disconnect also the purple wire and reconnect the yellow wire.
The purple wire should not be reconnected.

RAW MATERIALS

HOUSING

Housing: PP20%T
Grommet Ø 10mm: Rubber
Bolts: M6X30 ZI

LENS


Lens: PMMA
Gasket: Cawiton
Screws: PK 3/8 X2 PH ZINC
Screws: AGL 4X25X16 ZINC

LEDS MODULE


Box: PC Black
PCB: 21 LEDS Amber / 24 LEDS Red
Cover box: PMMA Crystal
Terminals and rivet: Brass

LIGHT SOURCE

LEDS 12 dual voltage
(12/24V) assembled in PCB
Operating Voltage: 13.5V and 28V
Power: Presence 1W – 1W
Stop: 4.5W and 9W
Side-indicator: 7.5W and 10W



Assembly with 1 rear lamp

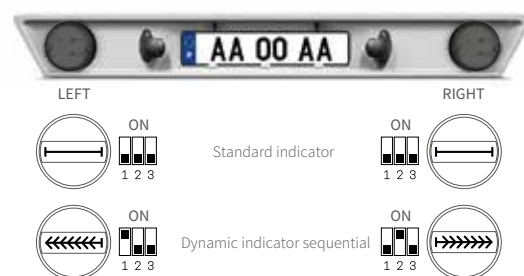

Assembly with 2 rear lamps side by side

